




RXLG-C 型铝外壳线绕电阻器 500W-1500W

RXLG-C Aluminum Housing Wire Wound Resistors 500W-1500W

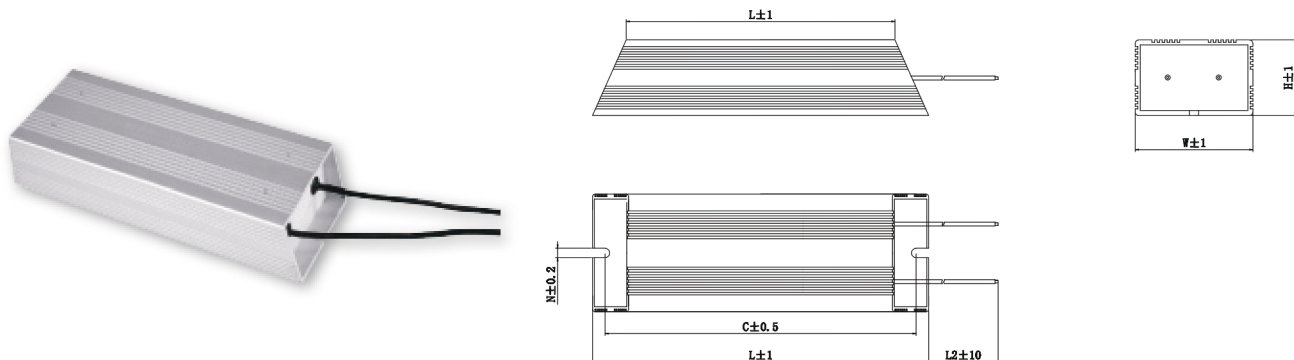

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高过载能力
High over loading ability
- 符合欧盟 ROHS 标准
ROHS compliant
- 外形美观、易于安装
Attractive appearance and easy installation

应用范围 Applications

- 电力分配, 负荷测试
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域
Ideal for functional power supply/Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and braking parts of industrial controlled servo drive system

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)							净重量 Net weight (g)
				L	L1	W	H	C	N	L2	
RXLG-C	500	1R ~ 1KR	±5% (J) ±10% (K)	200	180	70	45	185	5.6	可定制	1450
	600	1R ~ 1KR		240	220			225	5.6		1750
	800	1R ~ 1KR		280	260			265	5.6		2050
	1000	1R ~ 1KR		350	330			335	5.6		2550
	1200	1R ~ 1KR		400	380			385	5.6		2900
	1500	1R ~ 1KR		500	480			485	5.6		3100

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXLG-C	500W	50R	±5%