
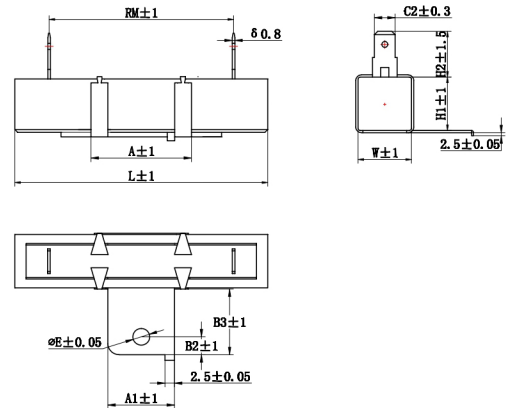


RX27-4/4V 型瓷壳线绕电阻器 10W-40W

RX27-4/4V Porcelain Housing Wire Wound Resistors 10-40W

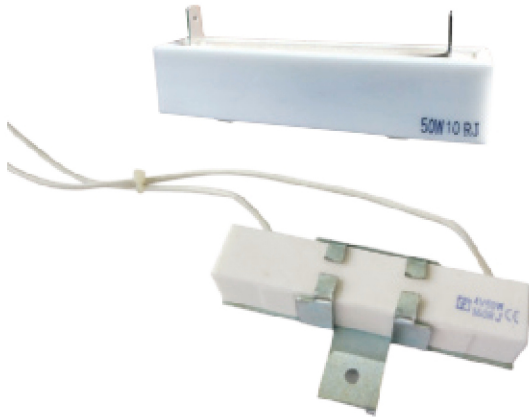

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 可提供安装套件（选购件）
Assembly and fittings (available)
- 高过载能力
High over loading ability

应用范围 Applications

- 电力分配，负荷测试
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and braking parts of industrial controlled servo drive system
- 应用于动力电池 Pack、新能源汽车行业
Applied to power battery pack and new energy automotive industry

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	外形尺寸 Dimensions (mm)											
			L	RM	H1	H2	C2	A	W	B2	B3	E	A1	&
RX27-4	10.0	R39~1K5	48	35.5-1.5	9.5	9	5	25	9.5	6.5	11.8	4	12	0.6
	15.0	R51~2K4	48	34-1.5	12.5	9	6/4.8	25	12.5	6.5	12.5	4	12	0.6
	20.0	R51~2K4	63.5	48-2.0	12.5	9	6/4.8	25	12.5	6.5	12.5	4	12	0.6
	25.0	R62~2K4	63.5	46.5-2.0	16.5	12	7.5/6.3	25	16	6.5	13.8	4.2	12	0.8
	30.0	R62~8K2	75	56-2.5	20	12	7.5/6.3	40	19	8	18	4.2	18	0.8
	40.0	R62~10K	90	71-3.0	18/20	12	7.5/6.3	40	19	8	18	4.2	18	0.8

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RX27-4/4V	40W	10R	±5%